

Motorisation solutions tailored
to your applications

10 Overview



■ D.C. motors and
geared motors



■ Brushless motors
and geared motors



■ Stepper motors
and synchronous
motors


www.crouzet.com



Contents

Editorial

■ Motorisation solutions	P. 4-5
■ Selection guide for brush motors	P. 6-7
■ Selection guide for brushless and electronic motors	P. 8-11
■ Selection guide for high-performance brushless motors	P. 12-13
■ Selection guide for voice coil actuators	P. 14-15
■ Selection guide for synchronous and stepper motors	P. 16-17
■ Process solutions	P. 18-19

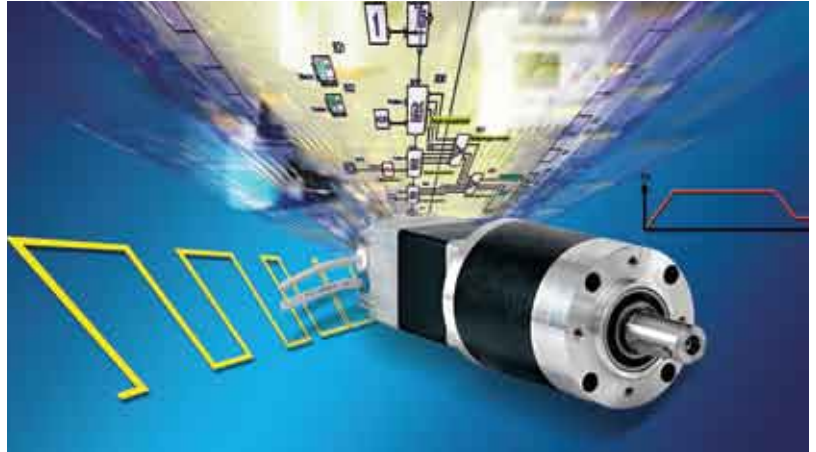

Widely recognised for over 50 years for its adapted motor solutions, Crouzet brings you its latest innovative range of 1 to 250 W and 0.1 to 50 Nm D.C. brush and brushless motors.

At the heart of this innovation lie exceptional motor performance and control, a wide range of associated gearboxes and the flexibility to adapt to any application, with complete solutions available based around several individual components or all-in-one versions (Motomate).

Crouzet is also continuing to innovate in terms of processes, production, logistics and quality to achieve the highest levels of service. This means you are guaranteed quality products on time, every time.

Whatever your strategy or requirements, **Crouzet is your ideal partner for innovative motorisation solutions designed for your applications.**



Since 2005, the CST (Custom Sensors & Technologies) "Business Unit" has incorporated the companies BEI Ideacod, Crouzet, Crydom, Kavlico and Kimco.

This new organisation means even better service and technical choice for our customers. In addition to the motorisation solutions contained in this catalogue, CST also offers a complete range of detection and control products.

Crouzet's Quality Control System has integrated environmental management into its processes. The production sites are ISO 9001 and ISO 14001 certified.



All Crouzet products are fully compliant with the RoHS Directive.

Eco-design is central to the company's "Offer Creation Process", the aim of which is to design products and services that correspond as closely as possible to customers' requirements and reduce their environmental impact throughout their life cycle.

Expertise in micromotors

► Tailored to your needs

▷ Innovation tailored to individual projects

To meet market expectations and provide customers with the right solutions within the shortest timeframes, Crouzet has structured all company processes around the different types of product available: standard products, adapted products or products specially developed for a customer. Introducing the adaptation wheel...

Specific products

Dedicated project engineers and teams

From the very start of a project, Crouzet experts work closely with your teams to develop the specifications. All our design, industrialisation and approval expertise goes into developing motorisation solutions that are tailored to your requirements.

Adapted products

Customer Adaptation Centre

Defined by your project teams and our specialists as part of a collaborative approach, these adapted products have exactly the right levels of performance and dedicated functionality you need for your applications.

Standard products


Sales service

A full range of motors, geared motors and associated controllers are immediately available so that you can create your automation applications as quickly as possible.

Products with added value

Customer Adaptation Centre

All our standard products can be supplemented by factory-mounted auxiliaries, accessories or programs, including connectors, leads, special terminals, dedicated shafts, adaptor plates, software, etc. Seamless integration in your equipment means you benefit from simpler logistics and optimum installation reliability.

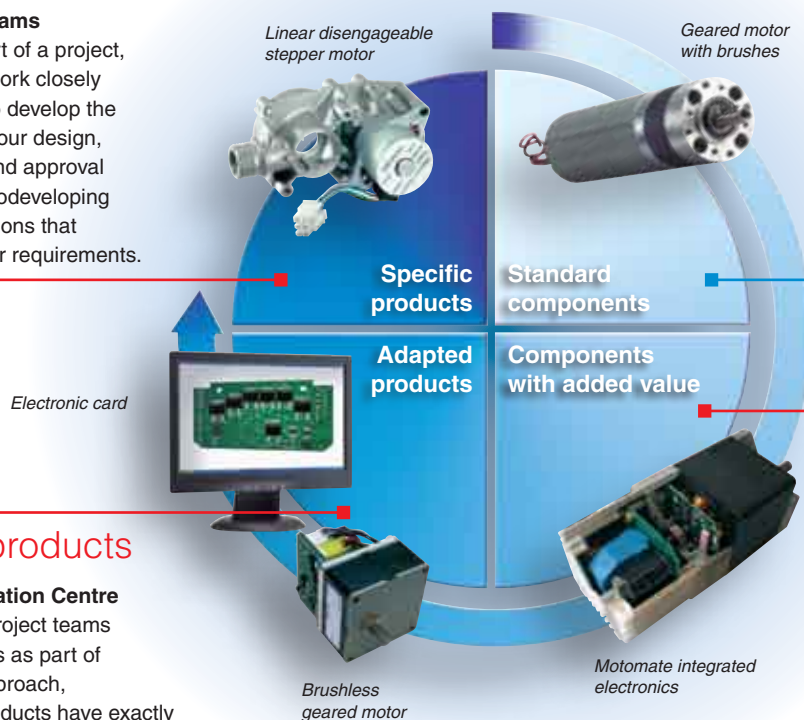

Help with compiling specifications



Development work in the design office



Production



Adaptation

► Benefits of an adapted motorisation solution

► Because each movement is different...

Whatever movement needs to be executed, Crouzet has all the technological expertise to develop a complete motorisation solution for you.

The Motomate

shown on the right is an example of an all-in-one adapted motorisation solution offering:

- Low development, assembly and installation costs
- Quick and easy setup
- Easy and effective motor control
- Autonomous motorisation that's easy to update (programming).

Braking and holding

Crouzet offers electromechanical brakes that can hold your system in position.

Communicating


Adding a communication module provides an interface with your central controller or PLC using various methods: standard and analogue I/O (0-10 V, 4-20 mA), PWM, fieldbus (Modbus, CAN, etc.) or radio link (Zigbee, etc.).

Supplying power

- A number of possible voltages: 6-12-24-48-90 V DC
- Regulated AC/DC power supplies available:
Output 24 V DC – 2 to 10 A

Controlling


Whether this is with an integrated logic microcontroller (Motomate) or in combination with an external logic controller (e.g. Millenium 3), Crouzet can manage all the control functions of your application: I/O, types of movement, counting, log, self-test functions, etc.

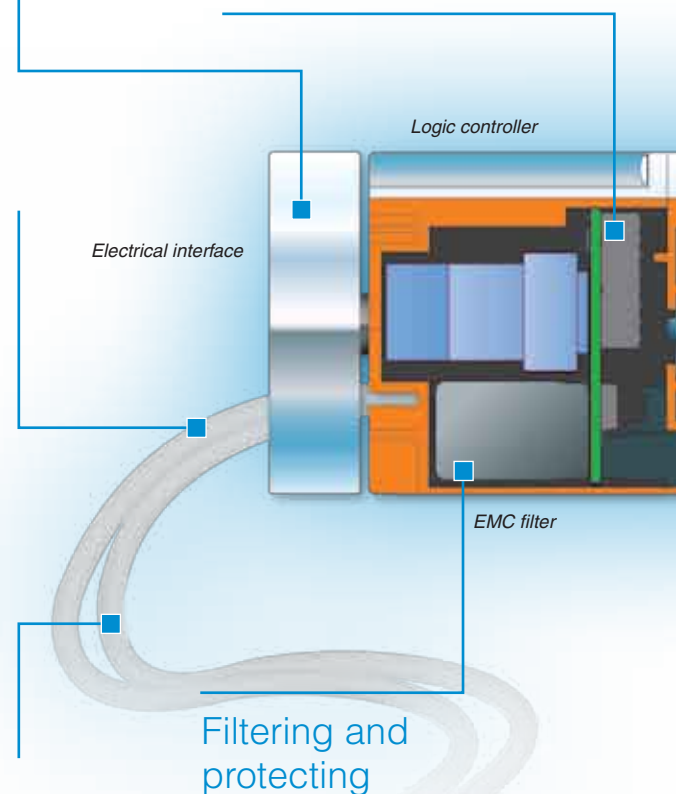

Filtering and protecting

Whatever the environment of your application, Crouzet can protect and filter its solutions:

- EMC (received and emitted)
- Temperature
- Mechanical (vibration, shock, etc.)
- Sealing



Motorisation solutions tailored to your needs

► Crouzet, experts in motorisation


Crouzet designs, manufactures and approves all the components of a motorisation system: motors, gearboxes, accessories, sensors, control electronics and software. From the simplest component (a rotor or a stator, a gear wheel, etc.) to the most complete solution (which may or may not be integrated), Crouzet has just the right motorisation solutions for your applications.

Driving

Open loop (stepper) or closed loop (DCB, BLDC), integrated or not integrated, Crouzet offers speed, torque and/or position controllers with control parameters (PID) adapted to your applications.

Converting

Using Crouzet gearboxes, motor speed and torque can be adapted to your applications: from 1 to 50,000 rpm and 0.1 to 30 Nm.

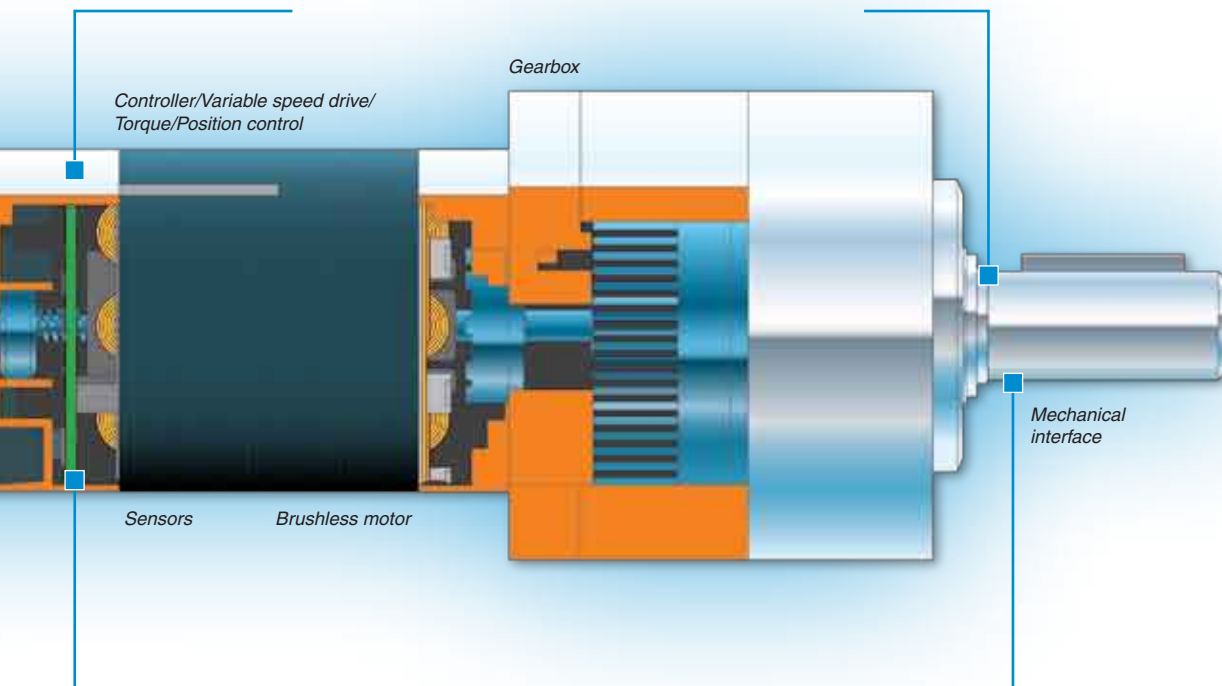


Sensing

To optimise motorisation servocontrol, Crouzet/CST is skilled in making current sensors, linear or angular position sensors (Hall effect, optical, magnetic, etc.) and temperature sensors.

Integration

Crouzet adapts the mechanical interfaces of its solutions for perfect integration into your equipment: fixing plate, transmission shafts, special pinions.



Gearboxes

Nominal torque (Nm)

Type of gearbox







Family

0.5

1.2

2

Direct drive motors

Diameter (mm)	Usable power (W)	Nominal torque (mNm)	Nominal speed (rpm)	81012 RPT5	81021 Ovoid	81038 PPGM	81032 GDR	81033 Double ovoid	81043 RE1
     									
Ø 24									
82710	1	3	3365	827120	827140			827190	
Ø 28									
82720	3	7	3500	82722	827240			827290	
Ø 32									
82860	3	7.7	3700	82862	82861			82869	82863
Ø 36									
82730	6.8	20	3265			82738			
82740	11 and 20	35	4600			827480			
Ø 42									
82810	8.7 and 13	41.5	2750			■	82812		80813
82800	16 and 22	75	3070			■	82802		80803
82850	32.5 and 33.5	100	3200						
Ø 63									
82830	27 and 50	172	2770				■		
82890	90 and 95	270	3360						

■ Adapted

Options



Encoder




































The entire Crouzet motor range is also available with a factory-mounted encoder (optical, magnetic).



Brake

Ø 42 mm and Ø 63 mm products can be fitted with a mechanical brake at power switch off.

D.C. brush motors and geared motors

	3	5	6	10	25
81044	81023	81037	81035	810326	81041
RE2	3 Nm	RC65	RC5	GDR2	90°
					
					Planetary
					
					
					
					
					
					
					
					
					
					
					
					
					

Note: All motors can be supplied with 12 or 24 V DC (Ø 42 and Ø 63 versions are also available in 48 V DC).



Applications

■ Medical

- ☐ Endoscopy
- ☐ X-ray equipment
- ☐ Dental equipment.

■ Industrial

- ☐ Pool robot
- ☐ Peristaltic pump
- ☐ Access control
- ☐ Printing.

Control electronics

Gearboxes

Nominal torque (Nm)

Type of gearbox

Family

5

1.2

6

4.5

15

81037

81035

810320

810326

810491

810493

RC65

RC5

GDR1

GDR2

Planetary 32

Planetary 42







Direct drive motors

Cross-section
(mm)Usable
power
(W)*

Output

Wi-
res

Connector



Ø 28



801005

17.5

✓



801091

□ 42



801100

25

✓



801170



801103

50

✓



801106

100

✓

□ 57



80040/80140

40

✓

✓



800455



800420



800425



80180

80

✓

✓



80050/80080

40/80

✓

■

■

■

Ø 57



801905

150

✓

□ 86



801203

205

✓

* With 24 V DC

■ Adapted

Options



Connections

- Cables
- Office connectors
- Industrial connectors.














Brake

Mechanical brake
at power switch off.

Encoder

Encoder with up
to 1000 points
per revolution.

D. C. brushless motors and geared motors

	25		50	120	10	20	
	810494	810495	810496	810497	810410	810412	
	Planetary K52	Planetary 52	Planetary 62	Planetary 81	Right angle		
							
							BDE30 BDE40
							BDE30 BDE40
							BDE30 BDE40
							BDE40
							BDE30 BDE40 SNI10 TNI20
							BDE30 BDE40 TNI20
							Motomate
							BDE40
							BDE40



Electronic cards

For more information,
see pages 10-11.

■ BDE30 and BDE40



■ SNI10



■ TNI20



■ Motomate



► Functions of the control electronics

Control circuits for brushless motors		Internal	
Type		SNi 10	TNi 20
			
Operating characteristics			
Supply voltage (V)	Min.	18	18
	Max.	28	37
Current (A)	Nominal	2	5
	Max.	3	6
Torque limiting			■
Speed adjustment		■	■
Positioning			■
Torque limit adjustment			M
Speed adjustment	0-10 V + PWM		■
	0-10 V		■
	PWM		■
	0-10 V + PWM	■	
	Open loop	■	■
Data bus	Closed loop	■	■
			■ CAN, Modbus
2 quadrants (without braking)		■	■
4-quadrant braking			
	Fixed, without rejection	■	■
	Adjustable		
	Energy-absorbing		
Hold in position			
Encoder output (3 x number of poles)	Adjustable		■
		■	■
Direction output			■
Torque limit reached output			■
Safety stop after 1 second of stalling		■	■
"Current limited to max. current" safety function		■	■
Electronic temperature safety function		■	■
Motor temperature safety function			■
Emergency stop by motor short circuit			■

■ Standard - ■ Adapted - M With external logic controller (e.g. Millenium 3, Crouzet)

**Control electronics (brushless)
Internal or external**

[illegible]





► Selection, standard and tailor-made

▷ If you are looking for a motor with very specific characteristics...

Crouzet, which is at the very heart of CST's motor business, is armed with the technical and industrial expertise it needs to offer high-performance brushless D.C. motor solutions that are widely recognised in the USA: BEI Kimco Magnetics.

- High and very high speeds:
10,000 rpm to 100,000 rpm
- Low speeds and high torques:
up to 5 Nm per motor shaft.
- Excellent dynamics due to the low inertia and low mechanical time constant of the motors.
- Very high power density.
- Reduced noise level resulting from the build quality of the motors and the management of magnetic fields (low torque fluctuation).
- Maximum possible torque constancy and smooth speed
- Motor start-up under low voltage, etc.
- Specifically shaped and dimensioned for your applications.

Standard product selection

	Parameters	Steady-state torque	Maximum speed	Peak stall torque	Electrical constant
	Unit	mNm	RPM	mNm	Millisec.
	Symbols	Tp	WNL	Tp	τ E
Part numbers					
Ø 28					
	80220101	8	18,000	21.2	0.15
	80220301	25	18,000	56.5	0.26
Ø 46					
	80240101	30	18,000	84.7	0.39
	80240201	53	16,000	141.2	1.44
	80240301	81	14,000	197.7	0.51
	80240401	95	14,000	254.2	0.55
Ø 51					
	80258101	30	14,000	98.9	0.52
	80258201	67	12,000	303.6	0.50
	80258301	101	12,000	423.7	0.56
	80258401	123	10,000	564.9	0.62
	80258501	155	10,000	656.7	0.68
Ø 86					
	80280101	353	18,000	850.0	1.90
	80280201	706	18,000	1760.0	3.10
	80280301	953	18,000	2470.0	3.70

► Applications

■ Medical

- CPAP (Constant Positive Air Pressure)
- Respiratory aid (ventilation)
- Blood pumps
- Ultrasound equipment.

■ Industrial

- Turbomolecular pumps
- Industrial pumps, etc.

■ Transport

- Motor gas analysis, etc.

■ Laboratory

- Centrifuges
- Analysers
- Gas analysers, etc.

Brushless D.C. motors High performance

► The wide range of existing motor sizes supports faster implementation and production and helps keep prices low.


Crouzet can meet even the most specific customer requirements by adapting the mechanical and magnetic structures of its motors and fine-tuning their individual characteristics.

Factors such as the shape of the magnetic fields, the choice of materials used (stator, magnets, bearings), the size of the components, the design of special air gaps, the number of rotor poles and the installation process can all be adapted to your requirements.

Tailor-made product selection

Continuous torque	Motor constant	Mechanical constant	Torque/speed factor	Friction torque	Mass
mNm	mNm/(watt) ^{1/2}	Millisec.	mNm/(rad/sec)	mNm	g
TCs	K _M	τ M	Fo	T _F	M

Existing range of motors (with casing)

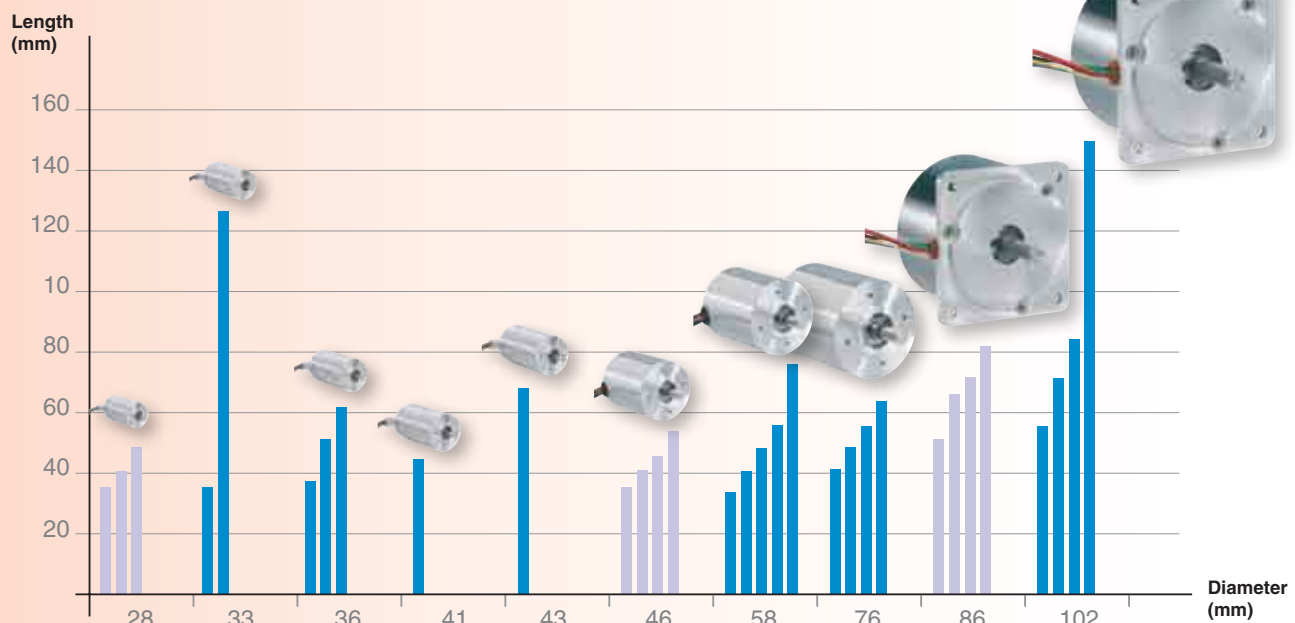

Adapted products



- **Adhesive mixer**
 - Hollow shaft
 - Wires integrated in a rigid tube
 - Special shape and connector for fast assembly in the application.



- **Centrifugal machine**
 - High-speed performance and smoothed torque
 - Balancing and accuracy of the shaft
 - High power density with good levels of dissipation through casing.







▶ Linear voice coil actuator


Crouzet, which is at the very heart of CST's motor business, is armed with the technical and industrial expertise it needs to offer innovative actuator solutions.

Voice coil (LA) actuators from BEI Kimco offer the perfect solution for more demanding applications. These include equipment for installing semi-conductors, military defence systems and intensive care equipment in hospitals. They use direct drives, are not subject to hysteresis or jerks and offer fast acceleration. They support precise position control; any restrictions in this respect are imposed by the resolution of the feedback device. The new types of housing offer the designer greater scope for miniaturisation and more flexibility. All products can be integrated and installed (including the encoder, shaft, limit switches or other functions) to help reduce workloads and costs.

▷ Operating principle:

The actuator consists of a stator bearing a high-performance magnet and an iron-free moving coil with very low inertia. By adding an encoder and controlling the value and frequency of the current, the user can generate very fast and highly precise linear movements.

Model	Part number	Dimensions (mm)	Peak force (N)	Continuous force (N)	Total stroke (mm)
Flat, rectangular					
	LA05-30-001Z	78 x 74 x 12	37.8	15.1	10
Rectangular					
	LA15-65-000A	76 x 38 x 165	88.69	24.47	6.35
Housed					
	LA16-27-000A	Ø 40 - L 46	60	17	6
Cylindrical (see image below)					
	LA08-10-000A	Ø 19 - L 25	6.67	1.96	4.06
	LA15-26-000A	Ø 38 - L 65	44.48	11.57	25.4
	LA28-22-000A	Ø 70 - L 55	266.89	87.74	11.43

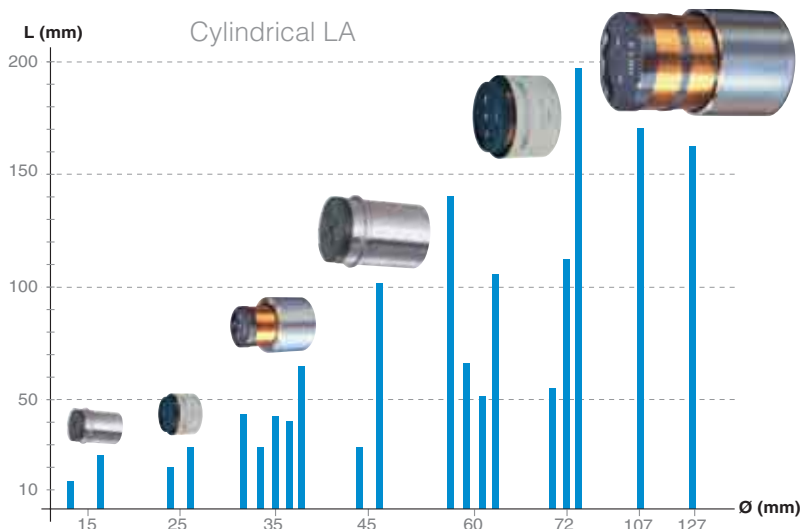

▶ Adapted products



■ Assembly containing 4 voice coil actuators for movement along 2 axes (Laser beam reflected by a pivoting mirror)

▶ Rotary voice coil actuator

Rotary actuators (RA) from BEI Kimco are used in many applications. These range from control of shafts and bonding equipment to "gimbal" and "pick-and-place" applications in the field of robotics.

The maximum function range of the actuators is ± 60 degrees and the maximum torque is 20 Nm.





The shaft has a hole to facilitate coupling and there are two holes for mounting on the application.

Rotary actuators are available in arc-segment or cylindrical designs.

▷ Operating principle:

The fixed magnet is supported by a stator (more or less rectangular in shape).

The coil is able to move around the arc of the circle, depending on the current flowing through it.

	Part number	Dimensions (mm)	Torque peak (Nm)	Continuous torque (Nm)	Max. angle (°)
	RA29-11-002A	72 x 27 x 45	0.226	0.093	32
	RA54-18-000A	35 x 45 x 60	1.85	0.798	7.5
	RA60-10-001A	95 x 30 x 38	0.847	0.396	30
	RA68-12-001A	95 x 30 x 45	1.2	0.649	20
	RA68-19-000A	120 x 46 x 55	7.06	1.76	14

▶ Applications

■ Medical

- ☐ Hospital respirator
- ☐ Valve control (pressure and flow)
- ☐ Scanner (per elastography)
- ☐ Endoscopic N2O inflator.

■ Industrial

- ☐ Tension control in textile applications
- ☐ Inspection metrology
- ☐ Pick-n-place equipment
- ☐ Stud welding tools
- ☐ Ophthalmic lenses manufacturing.























■ Laboratory

- ☐ Auto-focus in optical applications
- ☐ Valve control (pressure and flow)
- ☐ High dynamic vibration machine.


Stepper motors - 5 to 12.5 W

Linear stepper motors

Stepper motors and geared stepper motors

Gearboxes						0.5	2	3	5
Max. torque (Nm)						81021	81033	81023	81037
Type of gearbox									
Direct drive motors									
Dimensions (mm)	Part number	Power consumption (W)	Holding torque (Nm)		Number of steps				
			2-phase	4-phase					
Ø 35/50									
	829105	5	25	20	24				
						829145	829195	809135	
	829100	5	20	15	48				
						829140	829190	809130	809170
Ø 51/77									
	829200	7.5	70	57	48				
						829240	829290	809230	809270
Ø 58/79									
	829300	10	180	155	48				
								809330	
Ø 65/65									
	829400	12.5	300	240	48				
									809470

Linear stepper motors (2 or 4-phase)

Dim. (mm)	Part number	Angular step of motor (°)	Avg. thrust force at 100 Hz (N)	Nominal stroke (mm)	Step (mm)
Ø 35/50					
	809100	7.5	58	10	0.0167
	809105	15	43	10	0.033

- Special output shaft.
- Special supply voltage.































- Special cable length.
- Special mounting plate.

- Customised electronics.
- Special connectors.


Non-reversible/reversible synchronous motors

Synchronous linear motors

Synchronous motors and geared motors

Gearboxes						0.5	2	3	5
Max. torque (Nm)						81021	81033	81023	81037
Type of gearbox									
Direct drive motors									
Dimensions (mm)	Part number	Usable power (W)	Nominal torque (mNm)	Nominal speed (rpm)	Supply voltage (V/Hz)				
Non-reversible									
Ø 47									
	823400	0.16	2.5	600	230/50				
						823440	823040		
	823305	0.42	8	600	230/50				
						823345	823055	803335	803375
Reversible = 2 directions of rotation									
Ø 36/50									
	825100	0.31	12	250	230/50				
	825105	0.52	10	500	230/50				
						825140/5	825190/5	805130/5	805170
Ø 51/75									
	825200	0.98	37.5	250	230/50				
	825204	1.12	30	375	230/50				
						825240/4	825290/4	805230	805270/4
Ø 58/79									
	825300	1.37	55	250	230/50				
								805330	
Ø 65/65									
	825400	2.65	106	250	230/50				
									805470

Synchronous linear motors

Dim. (mm)	Part number	Voltage/Frequency (V/Hz)	Avg. thrust force at 100 Hz (N)	Nominal stroke (mm)	Speed (mm/s)
Ø 35/50					
	805100	230/50	45 max.	10	3.33
	805105	230/50	38 max.	10	6.67

- Special output shaft.
- Special supply voltage.

- Special cable length.
- Special mounting plate.


- Customised electronics.
- Special connectors.

► A customer-oriented process

Choosing the right solution and process

Taking account of your project and goals, we can:

- Process your order within 24 hours for standard products in stock.
- Adapt a standard product (Customer Adaptation Centre).
- Develop an innovative solution just for you (Project team).

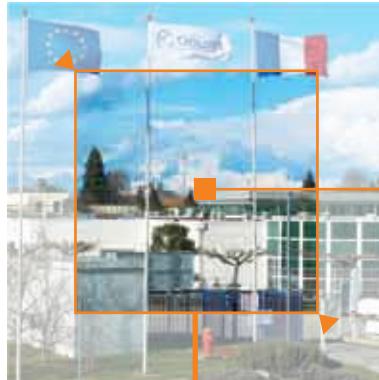

Project analysis

- Technical sales experts at your side.
- Analysis of your objectives, constraints and key success factors to draw up the project specifications.
- Advisory and recommendations meeting.
- Action plan for seamless project execution.

Development, validation and approval

Crouzet has effective processes in place for developing, validating and approving all product offers:


- Simulation tools
- Test bench (servocontrol/motor performance, service life, etc.)
- Laboratories, etc.



Innovation

Based on their experience in a wide range of sectors, Crouzet's design offices share common objectives:

- Basing innovation on market standards and the best technological options.
- Combining a number of technologies to create innovative concepts.

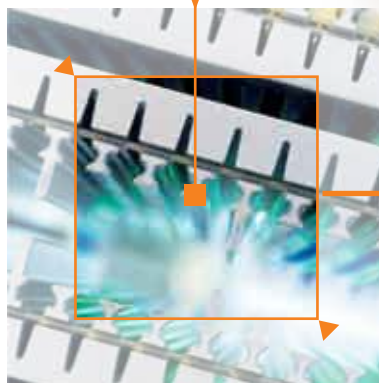

Long-term partners

Our specialists work closely the various project phases, as the project progresses to new developments or challenges.

Process solutions: a dynamic process in motion



Six Sigma process management

For product offers that comply with the highest quality standards and ensure fast and efficient deliveries.



Logistics

Logistics teams are involved in all new projects from the outset and share a set of common goals:

- Weekly and daily planning (forecasts).
- A close relationship with your departments.
- Just-in-time processes.
- Network of partnerships with our suppliers.

The Crouzet logistics platform ensures optimum logistics flows as well as the reliability of your supplies.


Industrialisation and production: lean manufacturing

From standard to special products, and small-scale to mass production, our production facilities offer all the industrial flexibility and expertise required to ensure that our products meet your needs in terms of logistics, quality and competitiveness.



Test laboratory

Our laboratories have facilities for testing all our products from design through to production. Whether this is done using simulation or in real tests (electrical, mechanical or environmental endurance), our products are validated, approved and monitored throughout the project development process.

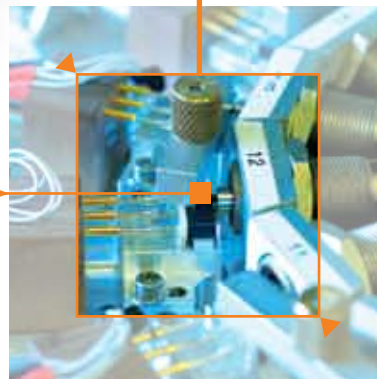

ship

with customers in managing
ensuring they are on hand
to offer support in tackling any
changes.



Headquartered in Moorpark, California-USA, **Custom Sensors & Technologies (CST)** is made up of the leading brands of Crouzet, Kavlico and Crydom, as well as the former divisions of BEI Technologies, including Newall and Syston Donner. CST provides sensors, controls, and actuation products to the transportation, industrial, and aerospace & defense markets.

www.cstsensors.com

Distributed by:

Crouzet Automatismes SAS

2 rue du Docteur Abel - BP 59
26902 Valence CEDEX 9
FRANCE

www.crouzet.com

CRZ BR 36/B EN
Ref. 6752300 EN
04/2010

AMERICA



BRAZIL
Custom Sensors & Technologies
Crouzet Latinoamerica
Alameda Rio Negro
1084 - cj.A31
CEP 06454-000 - Alphaville - SP BRASIL
Tel. : +55 (11) 4191 9797
Fax : +55 (11) 4191 9136
E-mail : info@cst-latinoamerica.com
www.crouzet.com.br
www.cst-latinoamerica.com



USA/CANADA/MEXICO
Custom Sensors & Technologies - Crouzet
2470 Coral Street
Vista, CA, 92081
USA
Tel. : +1 (800) 677 5311
Fax : +1 (800) 677 3865
E-mail : customerservice@us.crouzet.com
www.crouzet.com



OTHER COUNTRIES
Custom Sensors & Technologies
Crouzet Latinoamerica
Alameda Rio Negro
1084 - cj.A31
CEP 06454-000 - Alphaville - SP BRASIL
Tel. : +55 (11) 4191 9797
Fax : +55 (11) 4191 9136
E-mail : info@cst-latinoamerica.com
www.crouzet.com.br
www.cst-latinoamerica.com

EUROPE MIDDLE EAST AFRICA



AUSTRIA
Crouzet GmbH
Zweigniederlassung Österreich
Spengergasse 1/3
1050 Wien
ÖSTERREICH
Tel. : +43 (0) 1 36 85 471
Fax : +43 (0) 1 36 85 472
E-mail : info-direkt@crouzet.com
www.crouzet.at



BELGIUM
Crouzet NV/SA
Dieweg 3 B
B - 1180 Uccle
BELGIUM
Tel. : +32 (0) 2 462 07 30
Fax : +32 (0) 2 461 00 23
E-mail : com-be@crouzet.com
www.crouzet.be



FRANCE
Crouzet Automatismes SAS
2 rue du Docteur Abel - BP 59
26902 Valence CEDEX 9
FRANCE
Tel. : +33 (0) 4 75 44 88 44
Fax : +33 (0) 4 75 55 98 03
E-mail : com-fr@crouzet.com
www.crouzet.fr

Customer service

N° Indigo 0 825 333 352

N° Azur 0 810 610 102
PREMIER APPEL LOCAL

Creation-Design: Communication Crouzet

Editing-Publishing: Sedoc

Photos-Graphics: Axxess, BEI Kimco, Daniel Lattard,
Schneider Electric

Printing: Imprimerie des Deux Ponts

CST
CUSTOM SENSORS & TECHNOLOGIES



GERMANY
Crouzet GmbH
Otto-Hahn-Str. 3, 40721 Hilden
Postfach 203, 40702 Hilden
DEUTSCHLAND
Tel. : +49 (0) 21 03 9 80-151
Fax : +49 (0) 21 03 9 80-222
E-mail : info-direkt@crouzet.com
www.crouzet.de



ITALY
Crouzet Componenti s.r.l.
Via Viganò De Vizzi, 93/95
20092 Cinisello Balsamo (MI)
ITALIA
Tel. : +39 (02) 66 599 230
Fax : +39 (02) 66 599 238
E-mail : crz-it-motori@crouzet.com
www.crouzet.it



SPAIN/PORTUGAL
Crouzet Ibérica
C/ Aragón 224, 2º 2ª
08011 Barcelona
ESPAÑA
Tel. : +34 (93) 484 39 70
Fax : +34 (93) 484 39 73
E-mail : es-consultas@crouzet.es
www.crouzet.es



THE NETHERLANDS
Crouzet BV
Industrieweg 17
2382 NR Zoeterwoude
NEDERLAND
Tel. : +31 (0) 71-581 20 30
Fax : +31 (0) 71-541 35 74
E-mail : com-nl@crouzet.com
www.crouzet.nl



UNITED KINGDOM
Crouzet Ltd
8 Cedarwood
Chineham Business Park
Crockford Lane
Basingstoke, Hampshire
RG24 8WD
UNITED KINGDOM
Tel. : +44 (0)1256 318 900
Fax : +44 (0)1256 318 901
E-mail : info@crouzet.co.uk
www.crouzet.co.uk



SWITZERLAND
Crouzet AG
Gewerbepark - Postfach 56
5506 Mägenwil
SCHWEIZ
Tel. : +41(0) 62 887 30 30
Fax : +41(0) 62 887 30 40
E-mail : info-direkt@crouzet.com
www.crouzet.ch



OTHER COUNTRIES
Crouzet Automatismes SAS
2 rue du Docteur Abel - BP 59
26902 Valence CEDEX 9
FRANCE
Tel. : +33 (0) 475 802 102
Fax : +33 (0) 475 448 126
E-mail : com-ex@crouzet.com
www.crouzet.com

ASIA PACIFIC

CHINA & HONG KONG

Custom Sensors & Technologies Asia (Shanghai) Limited - Crouzet
2 Floor, Innovation Building
No. 1009, Yi Shan Road
Shanghai 200233
CHINA
Tel. : +86 (21) 2401 7766
Fax : +86 (21) 6249 0701
E-mail : china@cstsensors.com
www.crouzet.cn
www.cstsensors.com

INDIA

Custom Sensors & Technologies - Crouzet
Prestige Meridian II
No. 30, 13th Floor,
Unit No: 1301 & 1302
Mahatma Gandhi Road
Bangalore 560 001
INDIA
Tel.: +91 (0) 80 4113 2204/05
Fax : +91 (0) 80 4113 2206
E-mail : crz_bangalore@crouzet.com
www.crouzet.co.in
www.cstsensors.com

TAIWAN

Custom Sensors & Technologies - Crouzet
3F, No. 39, Ji-Hu Road
Nei-Hu Dist. - Taipei 114
TAIWAN
Tel. : +886 (0)2 8751 6388
Fax : +886 (0)2 2657 8725
E-mail : taiwan@cstsensors.com
www.crouzet.tw
www.cstsensors.com

KOREA & JAPAN

Custom Sensors & Technologies - Crouzet
5F, Jeil Bldg.
94-46 Youngdeungpo-dong
7-ga Youngdeungpo-gu
Seoul 150-037
SOUTH KOREA
Tel. : +82 (0)2 2629 8312
Fax : +82 (0)2 2629 8310
E-mail : korea@cstsensors.com
www.crouzet.tw
www.cstsensors.com

SOUTH EAST ASIA & PACIFIC

Custom Sensors & Technologies - Crouzet
3F, No. 39, Ji-Hu Road
Nei-Hu Dist. - Taipei 114
TAIWAN
Tel. : +886 (0)2 8751 6388
Fax : +886 (0)2 2657 8725
E-mail : eap@cstsensors.com
www.crouzet.tw
www.cstsensors.com

Warning:

The product information contained in this catalogue is given purely as information and does not constitute a representation, warranty or any form of contractual commitment. CROUZET Automatismes and its subsidiaries reserve the right to modify their products without notice. It is imperative that we should be consulted over any particular use or application of our products and it is the responsibility of the buyer to establish, particularly through all the appropriate tests, that the product is suitable for the use or application. Under no circumstances will our warranty apply, nor shall we be held responsible for any application (such as any modification, addition, deletion, use in conjunction with other electrical or electronic components, circuits or assemblies, or any other unsuitable material or substance) which has not been expressly agreed by us prior to the sale of our products.